

AI series



AI Series POSITIONER AI-1PC

High Speed and High Accuracy

Model
AI-1PC500


Positioner Headstock



AI-1PC series High-speed motion increases production efficiency!

- **Faster** Increasing productivity due to faster speed, 120 degrees per second (1PC500).
- **Accurate** Adopting Non-Backrush mechanism for high accuracy.
(Position Repeatability $\pm 0.1\text{mm}$ (At 300mm from Rotation Center)).
- **Durable** Simple drive system can reduce the risk of failure.
- **Easy Installation** Designed for Compact, lightweight and easy installation.
Standard built-in secondary welding terminal (500A) for easy connection.
Cables and hoses can be routed at center of rotation table due to through-hole design.
Thus, the welding jig can be simply connected.

AI-1PC500

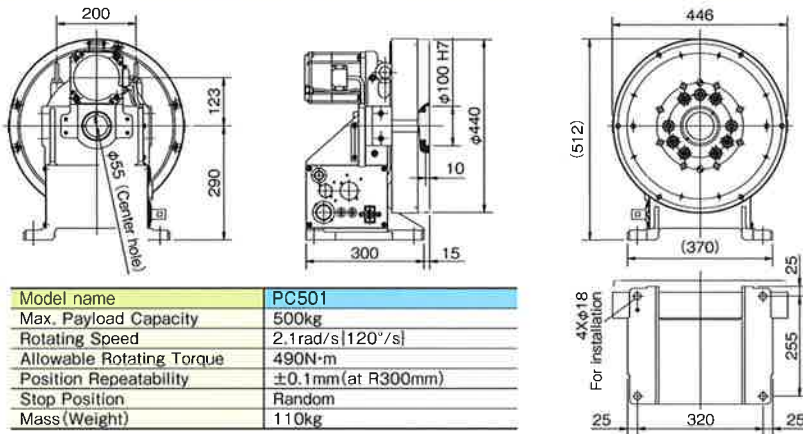

◆Optional

Items	Specification	Items	Specification
Connector Cover	Protecting cable connectors from dusty environment.	Rotaly Joint	Signal Line:6 channel(Max.2A) Air Line:2
Curly Code	12 Wires(0.5mm ² x12)		Continuous working pressure 0.49MPa Maximum working pressure 0.98MPa(one hour or less)
Point Marking	Required when Cross-mastering		


◆Useful Optional Softwares

● **Synchromotion** Synchronizing Robot and positioner motion to keep the best welding angle and constant speed for minimizing improper welding such as less-penetration and increasing productivity!


● **Multi-Synchromotion**
Synchromotion can be possible with multi-Positioners. This function reduces the dead time of loading and unloading the workpiece.



● **Multi-Drive Control**
Minimizing the unnecessary twisting force applied on parts by full synchronization between two positioners.



● **Endless Rotation Function**
Endless-Rotation Function can optimize(minimize) the movement amount on positioner. This can save the unnecessary motion positioner and deducing cycle time.



● **Pitch Copy and Shift Function**
This function is effective only when many workpieces of the same shape are placed at the same intervals.



In accordance with DAIHEN's policy to make continuing improvements, design and/or specifications are subject to change without notice.

DAIHEN Corporation

4-1.Koyochonishi, Higashinada-ku, Kobe, Hyogo 658-0033, Japan
Phone : (Country Code 81) 78-275-2006
Fax : (Country Code 81) 78-845-8159

Distributed by :



Triadtech Enterprise Co.,LTD.
No. 66, Shui-an 7th St., Taoyuan Dist., Taoyuan City 330063, Taiwan (R.O.C.)
TEL: 886-3-3218411 FAX: 886-3-3218422
E-mail: tec-tw@tec-robot.com.tw

Triadtech Enterprise (Shanghai) Co., LTD.
No.236, Lane 2999, Bao'an Highway, Jiading District, Shanghai
TEL: 86-21-59106733
FAX: 86-21-69521842
E-mail: tec-robot@163.com

1.2011.1BD
PRINTED IN JAPAN

Note: This product and the technologies (including software) used in the product are subject to Copyright control. When exporting any of them, verify the users, applications, etc. according to the applicable laws and regulations and take appropriate procedures such as applications for export permission to the Minister of Economy, Trade and Industry if required.